


Quality Insulation Inspection (QII)


Insulated Header Requirements Per CF2R-ENV-21-H, Section C, Number 13

Condition 1 – Two-member header with insulation in between. Header and insulation must fill the wall cavity.

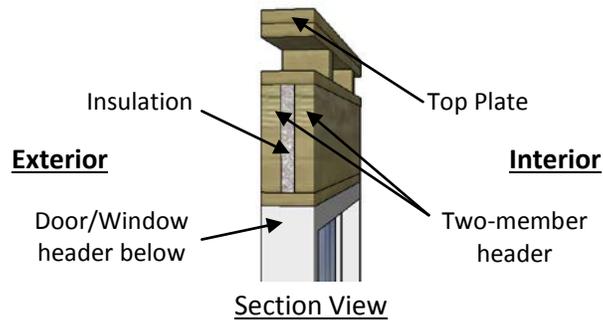


Example: 2x4 wall with (2) 2x nominal headers or 2x6 wall with a 4x nominal & 2x nominal headers.
Insulation required to fill wall cavity, must be installed between headers.

Condition 2 – Single-member header, less than width of wall, with insulation to the interior face.
Header and insulation must fill the wall cavity.

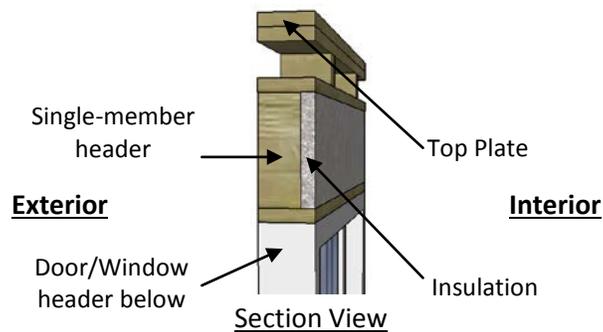

Example: 2x4 wall with 3 1/8" wide header or 2x6 wall with a 4x nominal header. Insulation required to fill wall cavity, must be installed to interior face of wall.

Condition 3 – Single-member header, same width as wall. Header must fill the wall cavity.

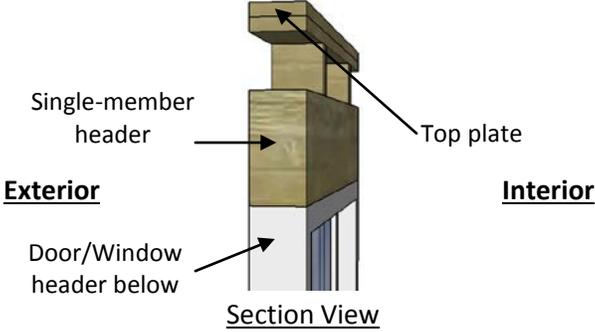

Example: 2x4 wall with a 4x nominal header or 2x6 wall with a 6x nominal header. No additional insulation required because header fills the cavity.