

# First Solar® FS Series 3™ PV Module

MECHANICAL DESCRIPTION	
Length	1200mm
Width	600mm
Weight	12kg
Thickness	6.8mm
Area	0.72m <sup>2</sup>
Leadwire	4.0mm <sup>2</sup> , 610mm
Connectors	Solarline II type connector
Bypass Diode	None
Cell Type	CdS/CdTe semiconductor, 154 active cells
Frame Material	None
Cover Type	3.2mm heat strengthened front glass laminated to 3.2mm tempered back glass
Encapsulation	Laminate material with edge seal

## Contact Info:

First Solar (US)  
Tel: 877 850 3757  
info@firstsolar.com

First Solar (Europe)  
Tel: +49 (0)6131 1443-0  
info@firstsolar.de



First Solar® FS Series 3™ PV Modules represent the latest advancements in thin film solar module technology. The Series 3 modules are IEC 61646 and IEC 61730 certified for use in systems up to 1000 VDC, UL Listed (600 VDC), and meet the requirements of Safety Class II. First Solar provides cost effective thin film module solutions to leading solar project developers and system integrators for large scale, grid-connected solar power plants. First Solar application engineers provide technical support and comprehensive product documentation to support the design, installation, and long term operations of high performance PV systems.

## High Performance PV System Solutions

### Key Features:

- Produces high energy output across a wide range of climatic conditions with excellent temperature response coefficient
- Proven to perform as predicted with a high Performance Ratio (PR)
- Frameless laminate is robust, cost-effective and recyclable, and does not require module grounding
- Manufactured in highly automated, state-of-the-art facilities certified to ISO 9001:2008 and ISO 14001:2004 quality and environmental management standards



### Warranty:

- Material and workmanship warranty for five (5) years and a power output warranty of 90% of the nominal output power rating ( $P_{MPP} \pm 5\%$ ) during the first ten (10) years and 80% during twenty-five (25) years subject to the warranty terms and conditions.
- Modules are life cycle managed with a collection and recycling program, providing module owners with no cost, prefunded, end-of-life take back, and recycling of the modules.

All specifications and warranties apply only to products sold and installed in North America. For applications in Europe please refer to the EU datasheet (PD-5-401-03 EU).

## Electrical Specifications

MODEL NUMBERS AND RATINGS AT STC <sup>1</sup> *							
Nominal Values		FS-370	FS-372	FS-375	FS-377	FS-380	FS-382
Nominal Power(+/-5%)	$P_{MPP}(W)$	70.0	72.5	75.0	77.5	80.0	82.5
Voltage at $P_{MAX}$	$V_{MPP}(V)$	48.1	49.5	49.8	50.4	50.7	51.0
Current at $P_{MAX}$	$I_{MPP}(A)$	1.46	1.46	1.51	1.54	1.58	1.62
Open Circuit Voltage	$V_{OC}(V)$	60.6	61.4	61.6	61.7	61.7	62.0
Short Circuit Current	$I_{SC}(A)$	1.74	1.75	1.76	1.75	1.76	1.78
Maximum System Voltage	$V_{SYS}(V)$	1000 (600 UL <sup>2</sup> )					
Temperature Coefficient of $P_{MPP}$	$T_K(P_{MPP})$	-0.25%/°C					
Temperature Coefficient of $V_{OC}$ , high temp (>25°C)	$T_K(V_{OC}, \text{high temp})$	-0.27%/°C					
Temperature Coefficient of $V_{OC}$ , low temp (-40°C to +25°C)	$T_K(V_{OC}, \text{low temp})$	-0.20%/°C					
Temperature Coefficient of $I_{SC}$	$T_K(I_{SC})$	+0.04%/°C					
Limiting Reverse Current	$I_R(A)$	3.5					
Maximum Series Fuse	$I_{CF}(A)$	3.5					

MODEL NUMBERS AND RATINGS AT 800W/m <sup>2</sup> , 45°C, AM 1.5*							
Nominal Values		FS-370	FS-372	FS-375	FS-377	FS-380	FS-382
Nominal Power(+/-5%)	$P_{MPP}(W)$	52.5	54.4	56.3	58.1	60.0	61.5
Voltage at $P_{MAX}$	$V_{MPP}(V)$	45	46	47	47	47	48
Current at $P_{MAX}$	$I_{MPP}(A)$	1.16	1.17	1.20	1.23	1.26	1.29
Open Circuit Voltage	$V_{OC}(V)$	56	57	57	57	57	58
Short Circuit Current	$I_{SC}(A)$	1.43	1.43	1.44	1.44	1.44	1.46


## Reliability and Safety

Tested by leading international institutes and certified for reliability and safety.

- Certified to IEC 61646
- Certified to IEC 61730
- CE Mark
- Safety Class II @ 1000 V
- UL 1703 and ULC 1703 Listed (Class C Fire Rating)
- Eligible CSI PV Module
- FSEC Certification



## Mechanical Drawing

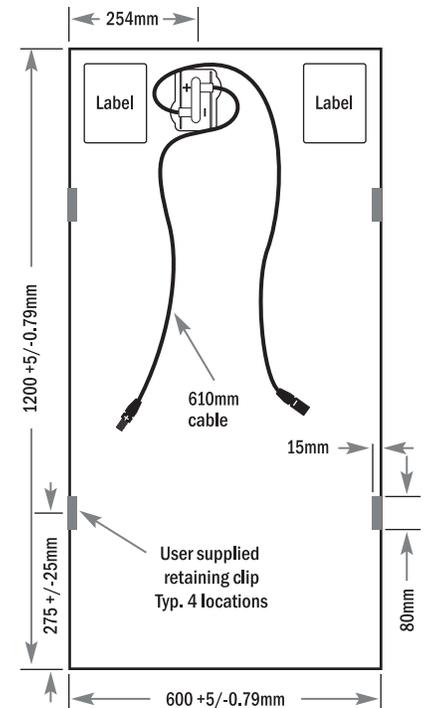

\* All ratings +/-10%, unless specified otherwise. Specifications are subject to change.

<sup>1</sup> Standard Test Conditions (STC) 1000W/m<sup>2</sup>, AM 1.5, 25°C

<sup>2</sup> Required to maintain UL compliance

## About First Solar

First Solar is a leading manufacturer of photovoltaic (PV) solar modules and provider of solar solutions. By continually driving down manufacturing costs, First Solar is delivering an economically viable alternative to fossil-fuel generation. From raw material sourcing through end-of-life collection and recycling, First Solar is focused on creating cost-effective, renewable energy solutions that protect and enhance the environment.

