

KEY PLAN

GENERAL NOTES FOR EROSION AND SEDIMENT CONTROL

1. UNLESS OTHERWISE INDICATED, ALL VEGETATION AND STRUCTURAL EROSION AND SEDIMENT CONTROL SPECIFICATIONS OF THE LOCAL BUILDING AUTHORITIES.
2. CONTRACTOR SHALL BE RESPONSIBLE FOR COMPLIANCE WITH THE SEDIMENT CONTROL MEASURES SPECIFIED. ALL PERMITTER SEDIMENT CONTROL SPECIFICATIONS SHALL BE INSTALLED PRIOR TO ANY MAJOR DISTURBANCE OF THE EARTH SURFACE.
3. ALL TOPSOIL REQUIRED FOR PAVEMENT SHALL BE STOCKPILED, IF TOPSOIL IS TO BE STOCKPILED ON SITE, ALL TOPSOIL PILES SHALL BE TEMPORARILY SEEDED AND MULCHED WITHIN SEVEN (7) DAYS AND SURROUNDED WITH A Silt FENCE.
4. ANY DISTURBED AREAS THAT WILL BE DOMINANT MORE THAN 45 DAYS AND NOT BE SUBJECT TO MAINTENANCE SHALL BE SEEDED AND MULCHED WITHIN SEVEN (7) DAYS.
5. PERMANENT VEGETATION IS TO BE SEEDED OR STOCKPILED ON ALL EXPOSED AREAS WITHIN SEVEN (7) DAYS AFTER FINAL GRADING AND CONSTRUCTION SHALL BE RESPONSIBLE FOR SEEDING SEEDS FOR THE RESPONSIBILITY OF THE CONTRACTOR UNTIL THE PROJECT IS 100 PERCENT COMPLETE AT WHICH TIME ALL TEMPORARY MEASURES WILL BE REMOVED BY THE CONTRACTOR.

MAINTENANCE SCHEDULE


- THE FOLLOWING PROCEDURES WILL BE USED TO MAINTAIN EROSION AND SEDIMENTATION CONTROLS.
- ALL CONTROL MEASURES WILL BE INSPECTED AT LEAST ONCE A WEEK AND AFTER ANY STORM EVENT OF 1/2 INCH OR MORE. REPAIRS OF EACH INSPECTION WILL BE KEPT ON FILE ON SITE.
 - ALL MEASURES WILL BE MAINTAINED IN GOOD WORKING ORDER. IF A REPAIR IS NECESSARY, THAT REPAIR WILL BE COMPLETED WITHIN SEVEN (7) DAYS.
 - Silt FENCES WILL BE INSPECTED FOR DEPTH OF ACCUMULATED SEDIMENT, TENS, ATTACHMENT TO POST AND STABILITY ON A WEEKLY BASIS.
 - TEMPORARY AND PERMANENT SEEDING AND PLANTING WILL BE INSPECTED FOR BARE SPOTS, WASHOUTS AND HEALTHY GROWTH.
 - INSPECT REPAIR AND ADJACENT SURFACED AREAS FOR BARE SPOTS AND WASHOUTS.
 - THE CONSTRUCTION MANAGER WILL SELECT INDIVIDUALS TO BE RESPONSIBLE FOR INSPECTIONS AND MAINTENANCE OF ALL EROSION AND SEDIMENTATION CONTROLS.
 - NECESSARY TRAINING FROM THE CONSTRUCTION MANAGER TO PROPERLY INSPECT AND MAINTAIN THE CONTROLS IN GOOD WORKING ORDER.
 - AN INSPECTION FORM WILL BE COMPLETED AFTER EACH INSPECTION. THE COMPLETED INSPECTION FORMS WILL BE FILED WITH THIS PLAN.

NOT TO BE USED FOR CONSTRUCTION


CONSTRUCTION SCHEDULE

- THE FACILITY WILL BE CONSTRUCTED GENERALLY FOLLOWING THE SEQUENCE INDICATED BELOW.
- OBTAIN RAIN APPROVAL AND OTHER APPLICABLE PERMITS.
 - STARTER IN THE LIMITS OF CLEARING AND GRUBBING. MAINTAIN A MINIMUM TEN FOOT BUFFER BETWEEN THE EDGE OF CLEARING AND THE EDGES OF CUT/FILL SLOPES. CONTRACTOR SHALL SEED AND MULCH ALL DISTURBED AREAS WITHIN (7) DAYS UNLESS OTHERWISE NOTED ON THE DRAWINGS.
 - ALL DIMENSION CUTTERS (PERMANENT AND TEMPORARY) SHALL BE SEEDED AND MULCHED WITHIN (7) DAYS AFTER COMPLETION.
 - CLEARING SHALL BE DONE IN PHASES. SEDIMENT BASINS AND SEDIMENT TRAPS SHALL BE INSTALLED PRIOR TO ANY MAJOR DISTURBANCE OF THE EARTH SURFACE.
 - THESE STRUCTURES LAND DISTURBANCE SHALL BE KEPT TO A MINIMUM UNTIL THESE STRUCTURES ARE COMPLETED AND ALL DIMENSION STRUCTURES ARE INSTALLED TO DRAIN STORM WATER TO THESE STRUCTURES.
 - INSTALL Silt FENCE AS INDICATED ON THE DRAWINGS.
 - LOCATE AND MARK THE AREA REQUIRED FOR INSTALLING Silt FENCING AND INSTALL THE Silt FENCE AS INDICATED ON THE DRAWINGS.
 - INSTALL TEMPORARY EROSION AND SEDIMENT CONTROL STRUCTURES ON THE PERIMETER OF INITIAL WORK AREAS.
 - CLEAR GRASS AND REMOVE GRADE THE FLAT SITE AND LANDOWN AREA. STOCKPILE TOPSOIL, BEST MANAGEMENT PRACTICES, INSTALL Silt FENCES AND CONSTRUCT TEMPORARY DIMENSIONS AS NEEDED DURING PERMANENT DIMENSIONS.
 - PAUL GRADE SPREADER SLOPES AND APPLY PERMANENT SEEDING.
 - INSTALL UNDERGROUND UTILITIES AND CONSTRUCT FOUNDATIONS.
 - ERECT BUILDINGS, TANKS AND EQUIPMENT.
 - COMPLETE FINAL GRADING.
 - COMPLETE PERMANENT SITE LANDSCAPING AND SURFACING.
 - REMOVE TEMPORARY EROSION AND SEDIMENT CONTROL STRUCTURES.

EROSION AND SEDIMENT CONTROL LEGEND

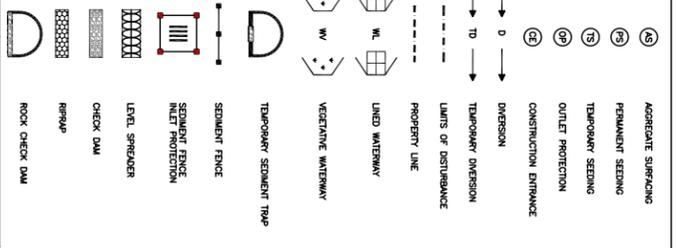

NO.	DATE	REVISIONS AND RECORD OF ISSUE	PREPARED BY	CHECKED BY	DATE	DESIGN NO.	PROJECT	SCALE



DESIGNED BY: BLACK & VEATCH
 PROJECT NO.: 069516-CSTF-S3100
 DATE: 10/04/01

GWF ENERGY LLC
 TRACY PEWTER PROJECT
 SITE - EROSION & SEDIMENT CONTROL
 GENERAL NOTES, LEGEND AND KEY PLAN