


OCCIDENTAL OF ELK HILLS INC
371-2G

Wellbore: ORIGINAL HOLE
 PBMD: 6,800.0ft
 Btm TMD: 8,150.0ft
 Spud Date: 3/2/1978 00:00
 BH Coord X: 6,154,801.30uss ft
 BH Coord Y: 2,286,313.30uss ft

Event: WELL MAINT - RIGLESS
 Event End: 5/7/2008 00:00
 Sec. Reason:

Ground Level: 846.0ft
 Datum: ORIGINAL KB @ 860.00ft (default)
 API No.: 0402958291

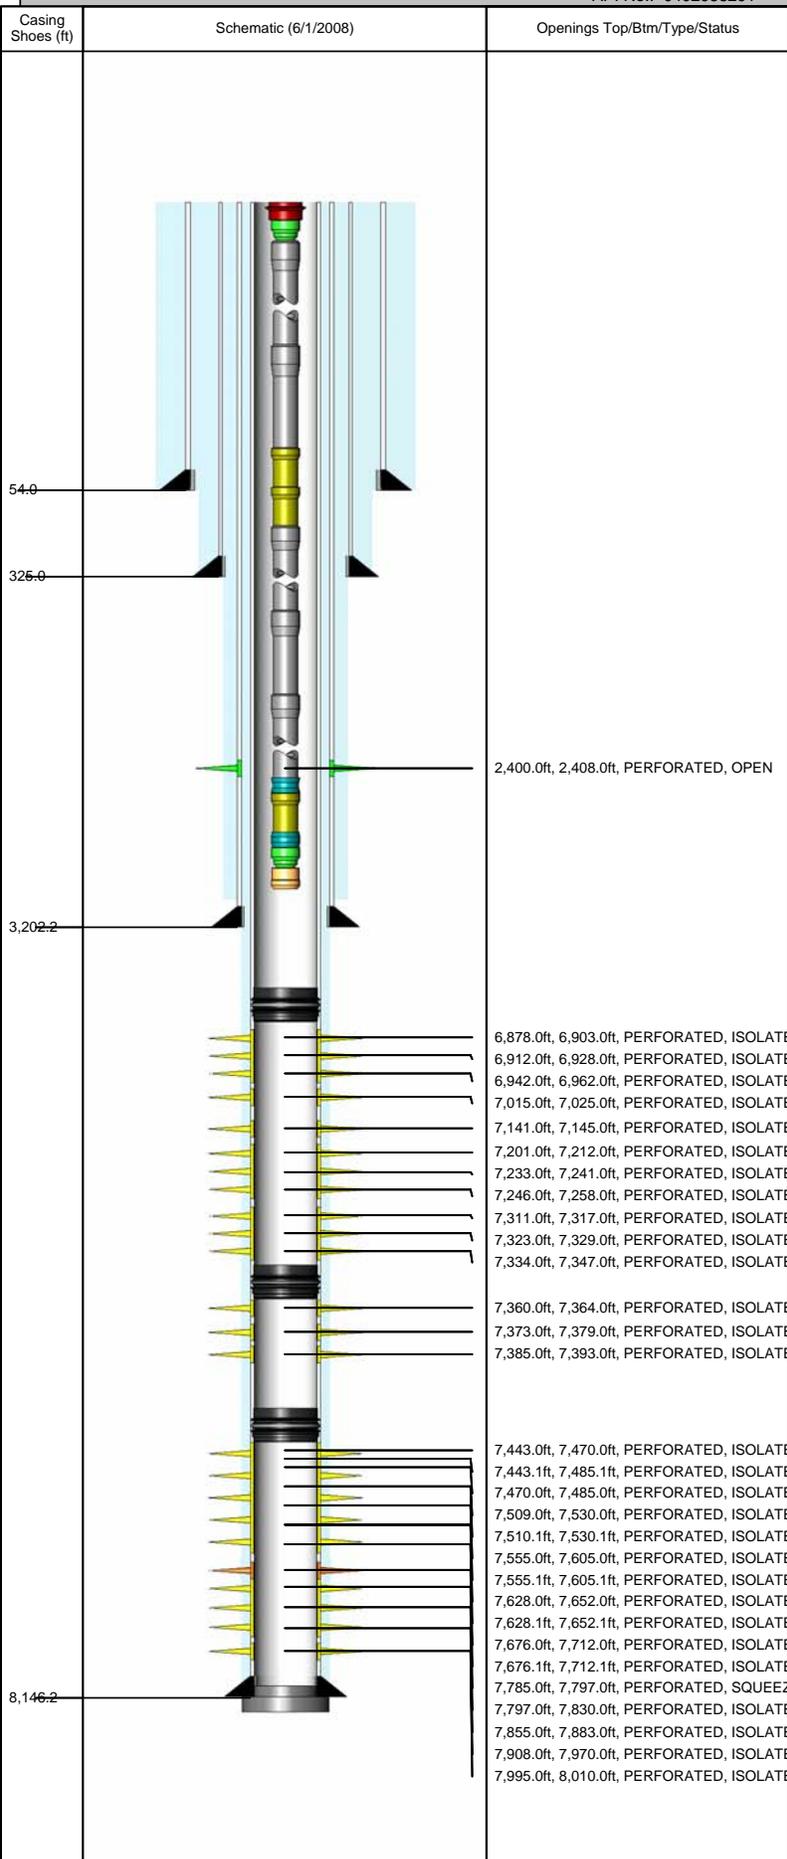

TUBING STRING			Report Date: 1/19/2008 00:00			CONDUCTOR CASING			Report Date: 3/2/1978 00:00					
Component	Top MD (ft)	Btm MD (ft)	Item	OD (in)	Grade	Wt. (ppf)	TopMD (ft)	BtmMD (ft)	Item	OD (in)	Grade	Wt. (ppf)	TopMD (ft)	BtmMD (ft)
TH-DBB	14.0	14.6	CASING JOINT(S)	20.000			14.0	54.0						
FATNIP	14.6	15.3	SURFACE CASING			Report Date: 11/29/1978 00:00								
CAS	15.3	46.8	Item	OD (in)	Grade	Wt. (ppf)	TopMD (ft)	BtmMD (ft)						
PUPJNT	46.8	53.0	CASING JOINT(S)	13.375	H-40	48.00	14.0	324.0						
PUPJNT	53.0	63.2	GUIDE SHOE	13.375			324.0	325.0						
CAS	63.2	2,410.0	INTERMEDIATE CASING			Report Date: 12/3/1978 00:00								
STNIP	2,410.0	2,411.1	Item	OD (in)	Grade	Wt. (ppf)	TopMD (ft)	BtmMD (ft)						
PUPJNT	2,411.1	2,421.2	CASING JOINT(S)	9.625	N-80	40.00	14.0	3,201.0						
PRONIP	2,421.2	2,422.4	GUIDE SHOE	9.625			3,201.0	3,202.2						
FATNIP	2,422.4	2,423.9	PRODUCTION CASING			Report Date: 12/30/1978 00:00								
WLREG	2,423.9	2,424.4	Item	OD (in)	Grade	Wt. (ppf)	TopMD (ft)	BtmMD (ft)						
PLUG BACK			Report Date: 1/15/2008 00:00											
Component	Top MD (ft)	Btm MD (ft)	CASING JOINT(S)	7.000	K-55	26.00	14.0	78.8						
BP-DR	6,800.0	6,802.5	CASING JOINT(S)	7.000	K-55	23.00	78.8	5,296.9						
PLUG BACK			Report Date: 6/22/2004 00:00											
Component	Top MD (ft)	Btm MD (ft)	CASING JOINT(S)	7.000	K-55	26.00	5,296.9	6,691.7						
BP-RET	7,355.0	7,358.5	FLAG JOINT	7.000	K-55	26.00	6,691.7	6,709.6						
PLUG BACK			Report Date: 6/2/2004 00:00											
Component	Top MD (ft)	Btm MD (ft)	CASING JOINT(S)	7.000	K-55	26.00	6,709.6	8,102.4						
BP-DR	7,435.0	7,437.6	FLOAT COLLAR	7.000		26.00	8,102.4	8,103.8						
PLUG BACK			Report Date: 1/1/1979 00:00											
Component	Top MD (ft)	Btm MD (ft)	CASING JOINT(S)	7.000	K-55	26.00	8,103.8	8,143.9						
CEMENT	8,102.0	8,146.0	FLOAT SHOE	7.000		26.00	8,143.9	8,146.0						
PLUG BACK			Report Date: 12/30/1978 00:00											
Component	Top MD (ft)	Btm MD (ft)												
CEMENT	8,146.0	8,150.0												

Well: 371-2G S/T/R: 2G/31S/24E

CASING CEMENT DETAIL

 Sfc Csg. Cmt Vol.: 361 cf
 Hole Size: 17.5"
 Top Job: No
 Rtns to Sfc: 20 cf
 TOC: Sfc

Interm Csg. Cmt Vol.: 2030 cf
 Hole Size: 12.25"
 Top Job: No
 Rtns to Sfc: 35 cf
 TOC: Sfc

Prod. Csg. Cmt Vol.: 2690 cf
 Hole Size: 8.75"
 Top Job: No
 Rtns to Sfc:
 TTOC: Sfc

Liner Cmt Vol.:
 Hole Size:
 Top Job:
 Rtns to Sfc:
 TTOC:

Top of Formation:
 UBA: 7441'
 BLW: 8080'

Volume Behind Pipe:
 1.3 Yield Assumed
 Theoretical Calculations (TTOC)